








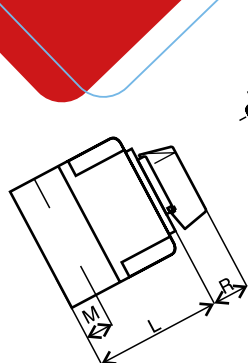

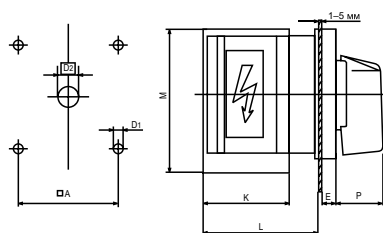
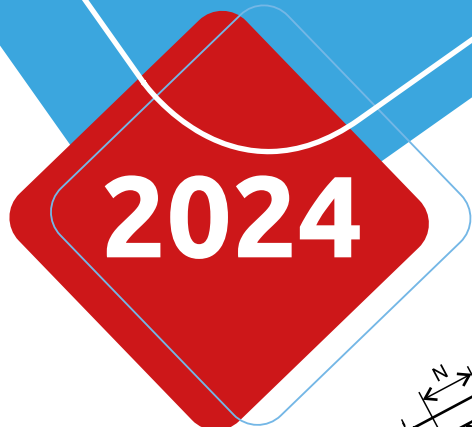
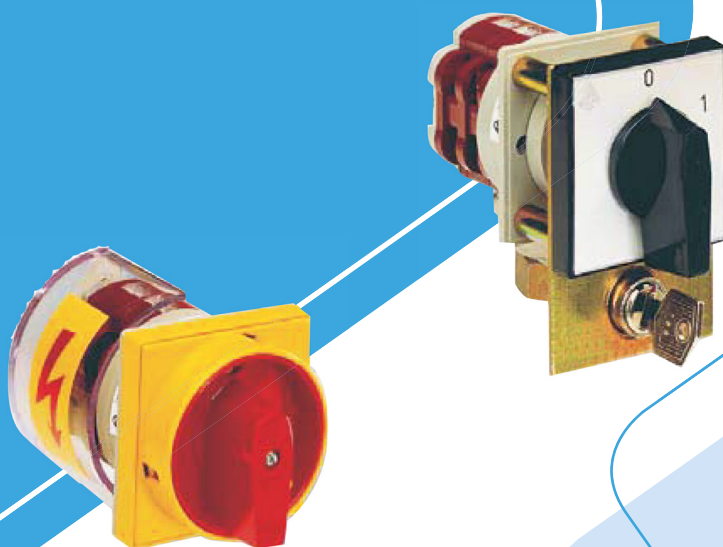
World Registrar Group
ISO 9001
ISO 14001
ISO 45001


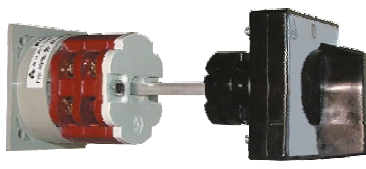


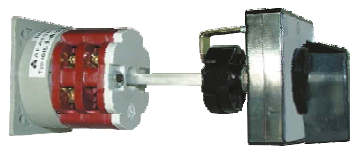













KATALOG

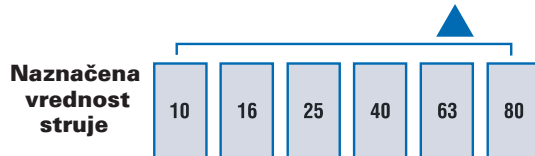
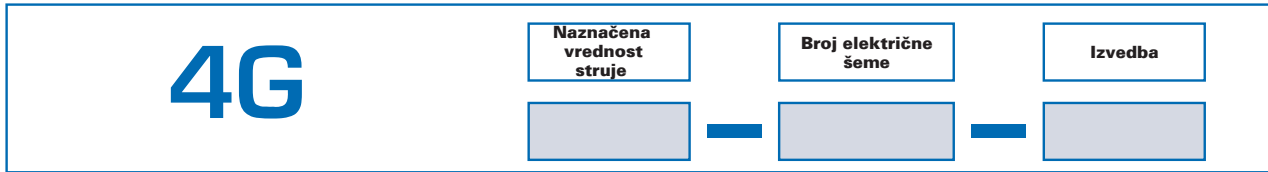
GREBENASTE

SKLOPKE

tip 4G

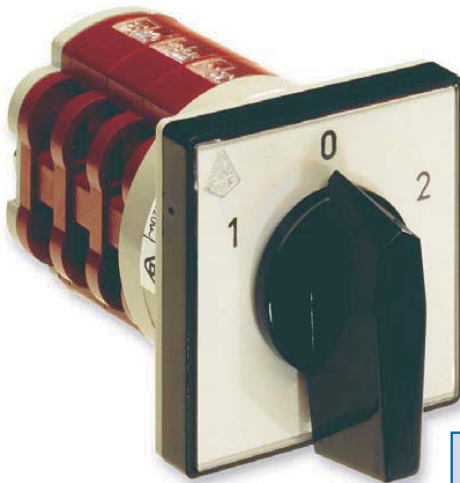


 <p>U</p>	 <p>S7</p>	 <p>S12</p>
 <p>PK</p>	 <p>S8</p>	 <p>S15</p>
 <p>PK S6</p>	 <p>S8S25</p>	 <p>S18</p>
 <p>S1</p>	 <p>S9</p>	 <p>S19</p>
 <p>S5</p>	 <p>S10</p>	 <p>S21</p>
 <p>S6</p>	 <p>S11</p>	 <p>S25</p>

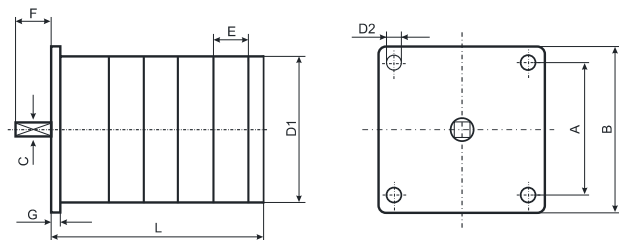


Broj električne šeme	Funkcija
90	Rastavljanje 0-1 1-pol
91	Rastavljanje 0-1 2-pola
10	Rastavljanje 0-1 3-pola
92	Rastavljanje 0-1 4-pola
12	Upravljanje motorima 0-Y-Δ
53	Izbor / preklop 1-0-2 3-pola
11	Određivanje smer obrtanja 3-faznih motora
66	Voltmetarska preklopka, tri međufazna, tri linijska napona

Izvedba



U



Grupa	Tip prekidača	D1	D2	A	B	C	E	F	G	L/ broj elemenata											
		∅	∅	□	□	□				1	2	3	4	5	6	7	8	9	10	11	12
A0	4G 10	38	4,3	36	48	6	9,6	22	4	33	42,5	52	61,5	71	81	90,5	100	109,5	119	129	138,5
A1	4G 16	57	4,3	48	65	6	13,5	26	3	46,5	60	73,5	87,5	101	114,5	128,5	143	156	169,5	183	196,5
	4G 25	57	4,3	48	65	6	13,5	26	3	46,5	60	73,5	87,5	101	114,5	128,5	143	156	169,5	183	196,5
A2	4G 40	80	5,3	72	90	8	18	31	5	56,5	74,5	92,5	110,5	128,5	146,5	164,5	182,5	200,5	218,5	236,5	254,5
	4G 63; 80	80	5,3	72	90	8	18	31	5	56,5	74,5	92,5	110,5	128,5	146,5	164,5	182,5	200,5	218,5	236,5	254,5